
7th CONFERENCE
on
DYNAMICAL SYSTEMS
THEORY AND APPLICATIONS
Łódź, December 8-11, 2003

**ITERATION IMPROVEMENT PROCEDURE OF A CONTACT ZONE
MAGNITUDE VIBRATIONS OF TWO-LAYERED UNCOUPLED PLATES**

V. A. Krysko, J. Awrejcewicz and O. Ovsiannikova

Abstract. A new iteration procedure for dynamical problems, where in each time step a contacting plates' zone is improved, is proposed. Therefore, a zone and magnitude of a contact load is also improved. Investigations of boundary conditions influence on externally driven vibrations of uncoupled two-layer plates, where for each of layers the Kirchhoff hypothesis holds, are carried out.

1. Introduction

Uncoupled multi-layer plates create a complex dynamical structure, where depending on input parameters, and initial and boundary conditions, various vibration types appear.

In spite of un-doubtable achievements in static and dynamical problems of non-linear theory of plates, the problems of contacts exhibited by multi-layer plates subject to both longitudinal and transversal time-changeable loads are less investigated.

2. Mathematical models

In this work, a model of two-layer construction, composed of thin elastic rectangular plates is studied [1]. The mean surface of a upper plate lies in plane $z = 0$, whereas the mean surface of the lower one lies in plane $z = \frac{1}{2}(\delta_1 + \delta_2) + h_1$, where: h_1 - distance between plates, δ_1, δ_2 - thicknesses of upper and lower plates, correspondingly. The plates are contacting with each other through external surfaces, projected into a corresponding mean surface, within a general Winkler's hypothesis

[2]. Note that each of plates is embedded in 3D space in R^3 with attached coordinates. Namely, senses of the axes Ox and Oy go into direction of mean surface of upper plate, whereas axis Oz goes into Earth centre. In the given coordinates, the three dimensional plates spaces Ω read

$$\Omega_1 = \{x, y, z / (x, y) \in [0, a] \times [0, b], -\frac{\delta_1}{2} \leq z \leq \frac{\delta_1}{2}\},$$

$$\Omega_2 = \{x, y, z / (x, y) \in [0, a] \times [0, b], \frac{1}{2}(\delta_1 - \delta_2) + h_1 \leq z \leq \frac{1}{2}(\delta_1 + \delta_2) + h_1\},$$

where the space $[0, a] \times [0, b]$ defines rectangular plate shape; D_1, D_2 are cylindrical plates stiffness.

The governing equations are

$$D_1 \Delta^2 w_1(x, y, t) + k \frac{E}{h} w_1(x, y, t) \Psi(x, y, t) = q_1^* + k \frac{E}{h} (w_2 + h_1) \Psi(x, y, t), \quad (1)$$

$$D_2 \Delta^2 w_2(x, y, t) + k \frac{E}{h} w_2(x, y, t) \Psi(x, y, t) = q_2^* + k \frac{E}{h} (w_1 + h_1) \Psi(x, y, t),$$

where the function

$$\Psi = \frac{1}{2} [1 + \text{sign}(w_1 - w_2 - h_1)] \quad (2)$$

$\Psi(x, y)$ plays a role of shells' contact space Ω^* indicator. Notice that if the initial plates location (clearance function) and the loads do not lead to a contact between plates during their deformations, then $\Psi \equiv 0$ and each of the plates vibrates independently. Otherwise, the governing equations are coupled.

The system (1) is associated with one of the following boundary conditions [3] on the boundary $\partial\Omega_1$

$$w_i \Big|_{\partial\Omega_i} = \frac{\partial w_i}{\partial n_i} \Big|_{\partial\Omega_i} = 0, \quad (3)$$

$$w_i \Big|_{\partial\Omega_i} = \frac{\partial^2 w_i}{\partial n_i^2} \Big|_{\partial\Omega_i} = 0, \quad (4)$$

$$(i = 1, 2)$$

Owing to the D'Alembert principle, q_i^* include both inertial and damping forces acting on the i -th plate of the form

$$q_i^*(x, y, t) = q_i(x, y, t) - \frac{\gamma_i}{g} \frac{\partial^2 w_i}{\partial t^2} - \varepsilon_i \frac{\partial w_i}{\partial t}.$$

The system (1) is of high order with respect to time and spatial coordinates (x, y) . The computational process is as follows: in each time step the following values are accounted from a

previous step $w_i|_{t_{k-1}} = w_i(x, y, t_{k-1})$; $\dot{w}_i|_{t_{k-1}} = \dot{w}_i(x, y, t_{k-1})$, and in order to improve a contact zone the following iteration procedure for time t_k is applied

$$\begin{aligned} D_1 \Delta^2 w_1^{(m+1)} + \frac{kE}{h_1} \Psi w_1^{(m+1)} &= q_1^{*n} + \frac{kE}{h_1} \Psi (w_2^{(m)} + h_1), \\ D_2 \Delta^2 w_2^{(m+1)} + \frac{kE}{h_1} \Psi w_2^{(m+1)} &= q_2^{*n} + \frac{kE}{h_1} \Psi (w_1^{(m)} + h_1). \end{aligned} \quad (5)$$

First PDEs (1) are reduced to the Cauchy problem through the second order method of finite difference, a then the problem is solved using fourth order Runge-Kutta method. In each time step the iteration Gauss procedure (5) is carried out, and the system order is reduced twice, what is important owing to computation time. Finishing the iteration procedure (5), the obtained values of w_i and \dot{w}_i serve as an initial condition for a next step of the Runge-Kutta method. The mentioned procedure allows for a contact zone improvement. Owing to the Runge principle, it has been found that the optimal step with respect to spatial coordinates is defined through a partition of space Ω_j into 15×15 parts, whereas time step is equal to $\Delta t = 1 \cdot 10^{-3}$. In what follows vibrations of two-layer plates with various boundary conditions along their contours are studied. The following four variants of the boundary conditions are accounted:

- (i) Two plates are clamped along their contours (boundary conditions (3));
- (ii) Two plates are ball-type supported (boundary conditions (4));
- (iii) Upper plate is clamped along its contour (boundary conditions (3)), whereas lower is ball-type supported along its contour (boundary conditions (4));
- (iv) Upper plate is ball-type supported along its contour (boundary conditions (4)), whereas lower one is clamped (boundary conditions (3)).













3. Two plates are clamped along their contours (boundary conditions (3))


Assume that two plates have same thickness ($\delta_1 = \delta_2 = \delta$), and the frequency of excitation $\omega_0 = \omega_p = 9.973$, where ω_0 is the frequency of a linear vibration of one-layer plate, $\varepsilon_1 = \varepsilon_2 = 0,6$. The clearance between plates is $\bar{h}_1 = \frac{h_1}{\delta} = 0,007$ (\bar{h}_1 - non-dimensional parameter). Both plates are subject to sinusoidal load of the form $q_i = Q_i \sin \omega p t$. Boundary conditions (3) are applied, and the initial conditions read:

$$w_i|_{t=0} = \dot{w}_i|_{t=0} = 0.$$

Recall that in each time step the iteration procedure (5) is applied. In Table 1, parts of time histories $w_i(0,5;0,5;t)$, $26 \leq t \leq 32$, phase portraits $w_i(w_i)$, and power spectrum $s(\omega)$ are presented only for lower plate, since the vibrations of lower plate are mirror reflection of the upper plate. Furthermore, the results are only given for the plate centre, since vibrations of other points are synchronized with those of the centre. During plates contact, there exist time instant where vibrations process is un-stationary one, then after a long time it achieves a stationary state. For $q_1 = -q_2 < 0.5$, the plates do not contact with each other, and harmonic vibrations occur.

Table 1.

Q	Signal	Phase portrait	Power spectrum
0,5	$w(0,5;0,5)$ 	w 	S 
2	$w(0,5;0,5)$ 	w 	S 
11	$w(0,5;0,5)$  <p style="text-align: center;">A</p>	w 	S 
12	$w(0,5;0,5)$ 	w 	S 
14	$w(0,5;0,5)$	w	S

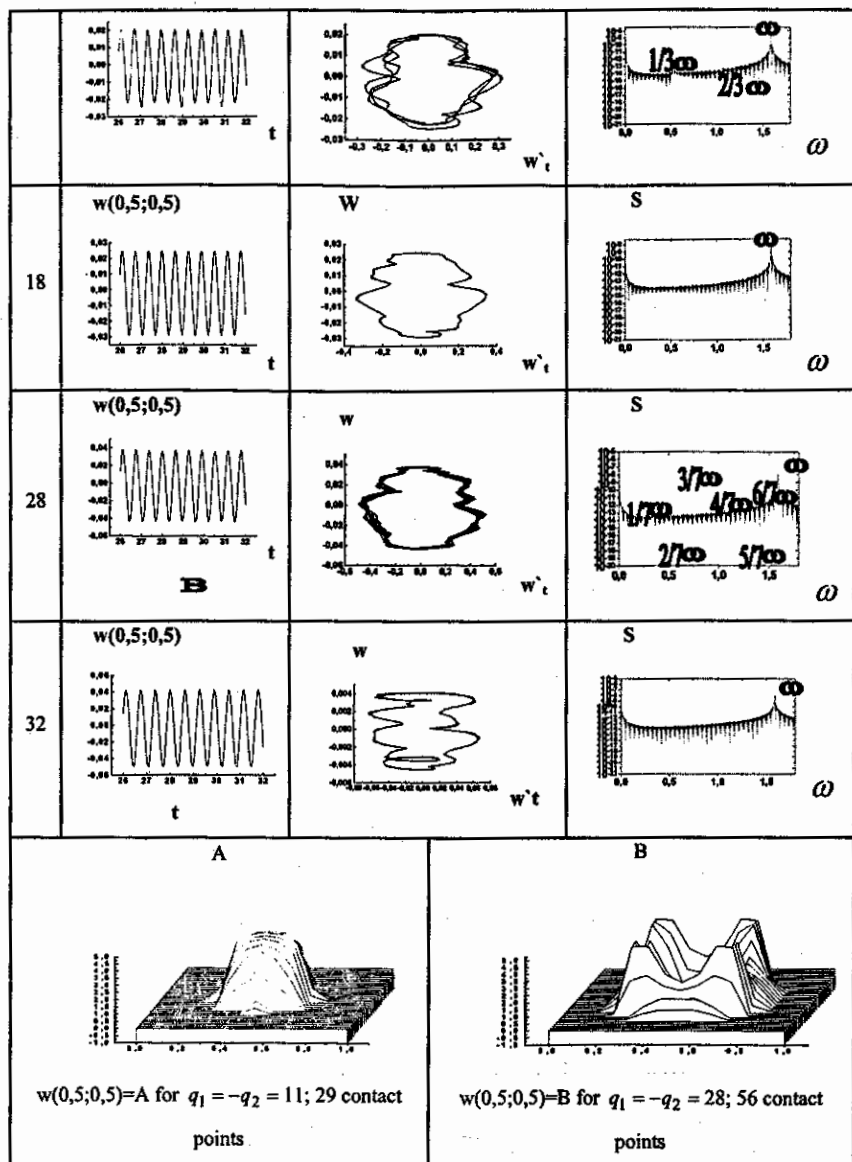










This observation is confirmed through the following characteristics: in power spectrum only one frequency is visible, and an ellipse occurs in the phase portrait. However, for $q_1 = -q_2 = 2$ (a contact


between plates occurred) a picture is changed: vibrations are not longer harmonic, and the phase portrait is of more complexity. Increasing the transversal load a Hopf bifurcation occurs with a period tripling ($q_1 = -q_2 = 11$) (see [4]). Further an interlace of vibrations on the excitation frequency and on the frequencies of period tripling and number eight is observed.


4. Boundary conditions (4)

Consider two-layer plate type construction with the same parameters as in the previously analyzed case, but with boundary conditions (4). Similar like in the previous case, for $q_1 = -q_2 = 0,5$ harmonic vibrations occur. However, now bifurcations appear already for $q_1 = -q_2 = 1,5$. Increasing q_i , a picture of plates bending becomes more complicated. For $q_1 = -q_2 = 3$ period tripling occurs, then a transition to chaos takes place ($q_1 = -q_2 = 4$). This is clearly expressed in both phase portrait and power spectrum. For $q_1 = -q_2 = 5$ again Hopf bifurcation appears, then its collapse takes place ($q_1 = -q_2 = 6$). The scenario is composed of interlace of Hopf bifurcations and a transition into harmonic vibrations.

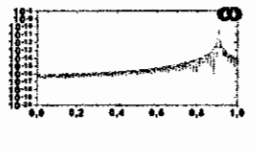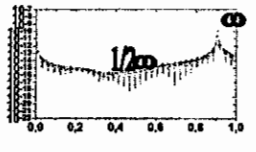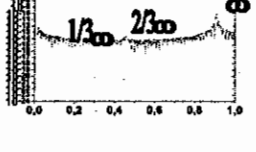Table 2.

Q	Signal	Phase portrait	Power spectrum
0,5	$w(0,5;0,5)$ 	W 	S 
1,5	$w(0,5;0,5)$ 	W 	S 
3	$w(0,5;0,5)$ 	W 	S 

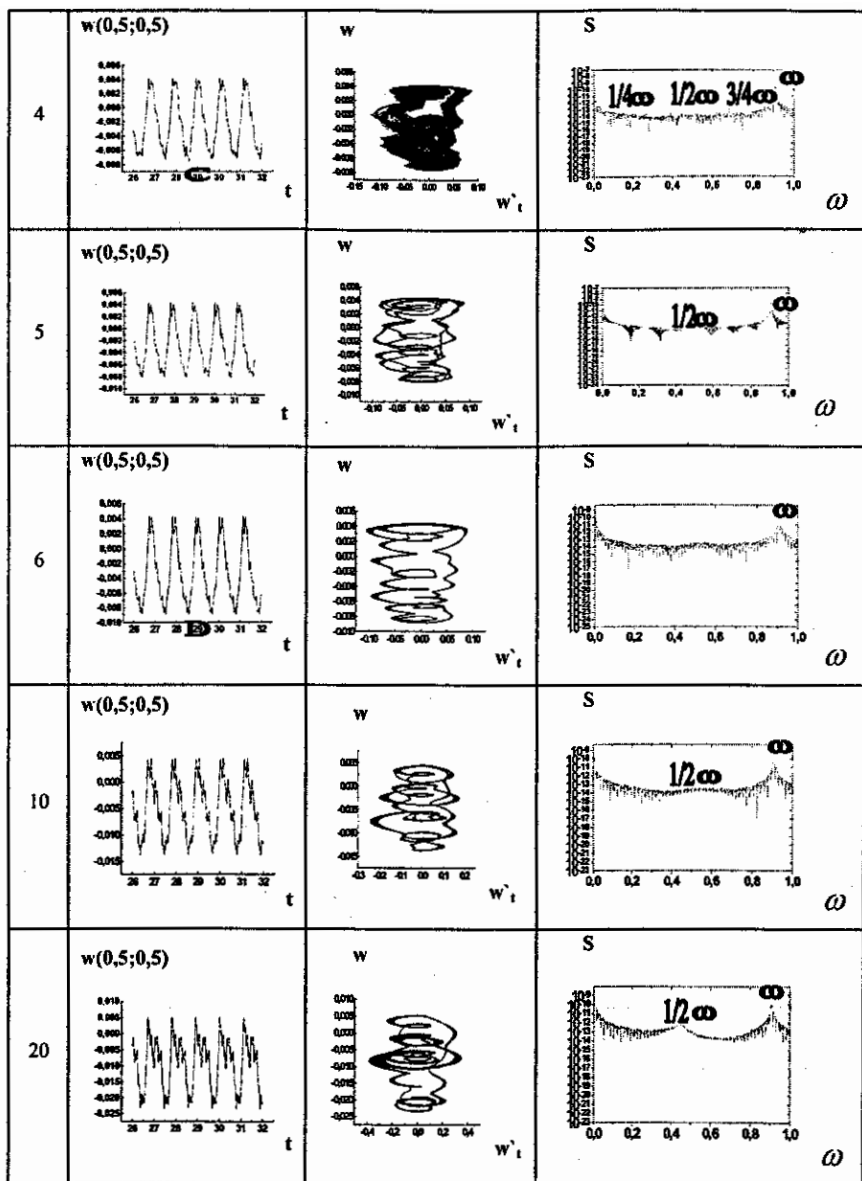

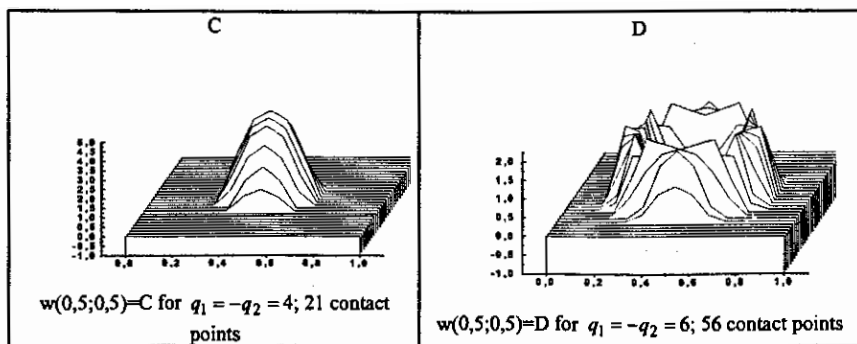


5. Vibrations associated with different boundary conditions


In Table 3 same characteristics as in Table 2 are reported, but now the upper layer is ball-type supported along the contour (boundary conditions (4)), whereas the lower is clamped (boundary conditions (3)).

For $q_1 = -q_2 = 0.5$, vibrations of two plates are harmonic, and each of plates vibrates with its own frequency. For $q_1 = -q_2 = 1.5$, when a contact between plates occurred, in upper plate power spectrum two Hopf bifurcations are remarkable, whereas period seven is associated with lower plate (see the power spectrum). For $q_1 = -q_2 = 3$, in the power spectrum of lower plate also two Hopf bifurcations appear, and two plates begin to vibrate with one frequency.

Table 3.

Q	Signal	Phase portrait	Power spectrum
$Q=0,5 \quad \omega=5,7$	<p>$w(0,5;0,5)$</p>	<p>w</p>	<p>S</p>
$\omega=9,973$	<p>$w(0,5;0,5)$</p>	<p>w</p>	<p>S</p>

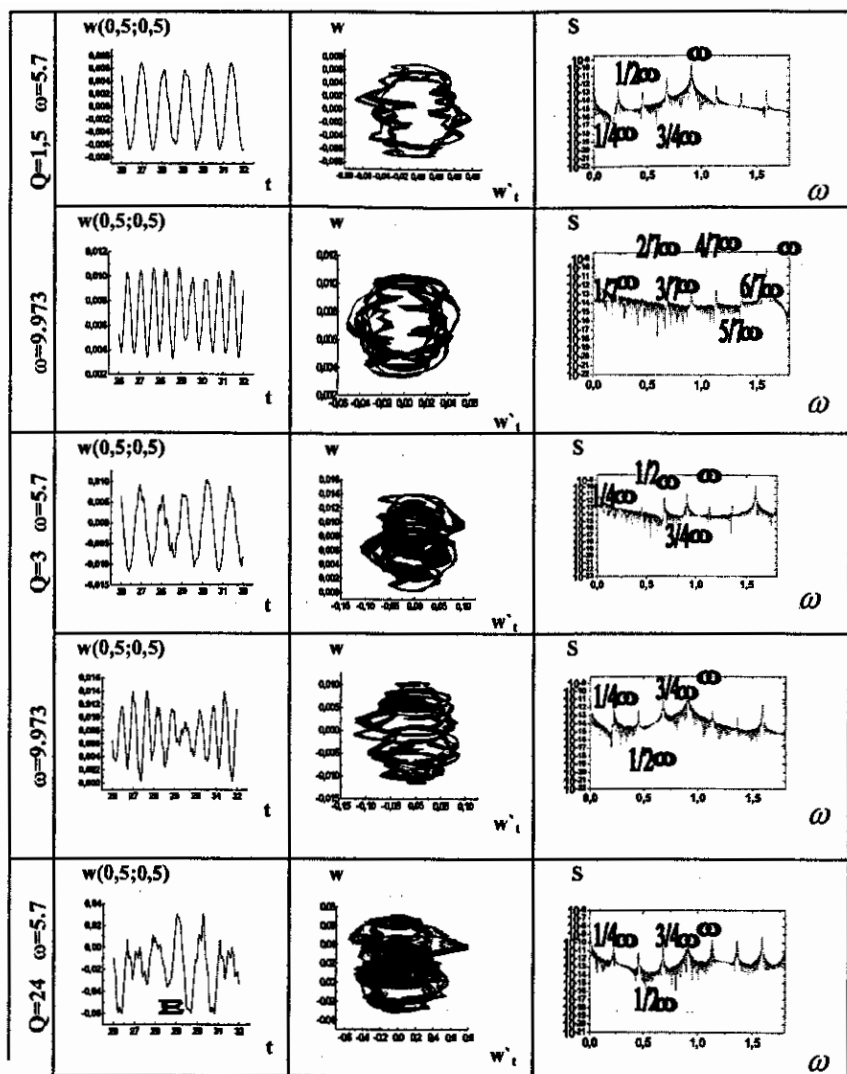


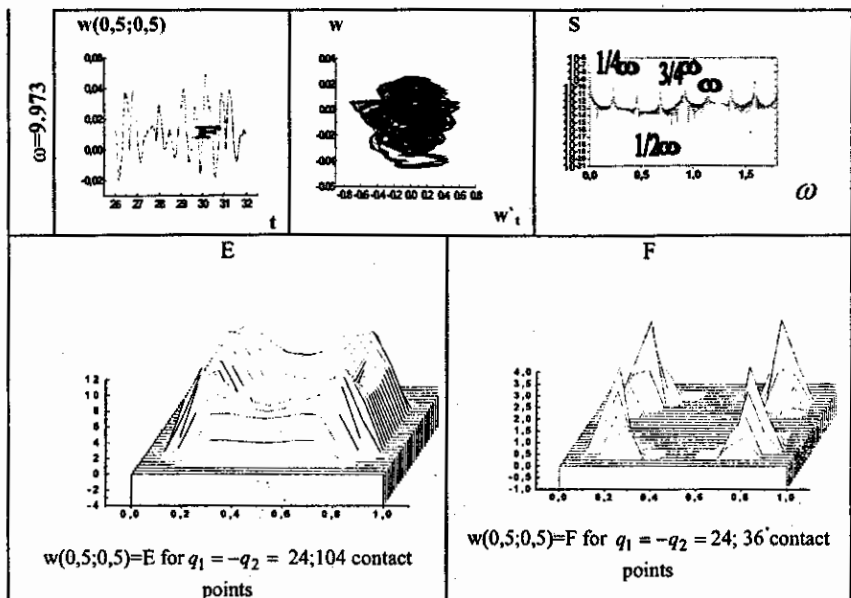

In Table 4 the same characteristics as in Table 2 are reported, but for different boundary conditions. Namely, upper plate is clamped through its contour (boundary conditions (3)), whereas the lower is supported through the boundary conditions (4).

Table 4.

Q	Signal	Phase portrait	Power spectrum
$Q=0,5$	$w(0,5;0,5)$ 	w 	S
	$w(0,5;0,5)$ 	w 	S

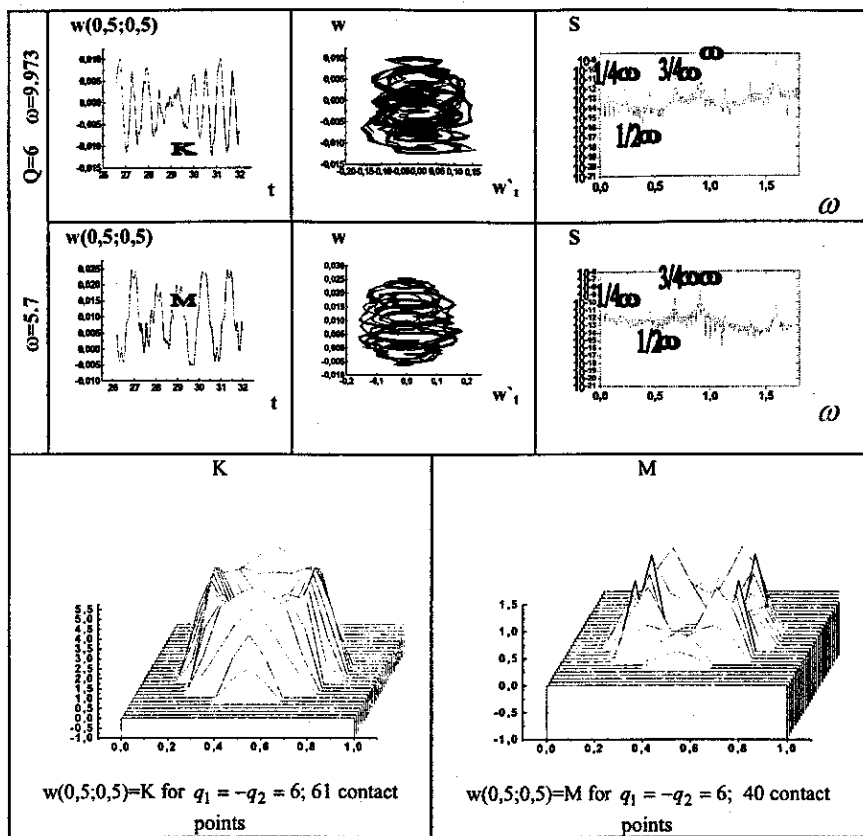

For $q_1 = -q_2 = 0.5$ both plates vibrations are harmonic. For $q_1 = -q_2 = 6$ vibrations of both plates are synchronized with one frequency. Then two Hopf bifurcations follow.

6. Conclusions

The carried out analysis exhibits a complex vibrations of two-layer system of plates: series of Hopf bifurcations occur, where period three, five and seven Hopf bifurcations occur. The detected bifurcations in our complex system have been theoretically predicted by A. N. Sharkovskiy while analyzing the logistic curves. It should be emphasized that contacting load depends essentially on the number of contacting points.

Some new dynamical phenomena have been detected. For example, if the upper plate is ball-type supported, and the lower one is clamped along its contour, synchronization takes place. Namely, both plates start to vibrate with the same fundamental frequency $\omega = 1.6$ (a ball frequency) earlier than in the case of clamping and ball-type supports. After the occurred synchronization, further increase of loading has not changed dynamics qualitatively.

References

1. Krysko A.V., Krysko V.A., Ovsianikova V.A., Babenkova T.B., Complex vibrations of two-layer uncoupled plates subject to longitudinal sinusoidal load. *Izvestia Vuzov, Stritel'stvo*, No 6, 2002, 23-30, in Russian.
2. Kantor B.Ya., *Contact Problems of Nonlinear Shells Theory*. Naukova Dumka, Kiev, 1990, in Russian.
3. Kornishin M.S., *Nonlinear Problems of Plates and Shallow Shells and Methods of Their Solutions*. Nauka, Moscow, 1964, in Russian.
4. Sharkovskiy A.N., Existence of cycles exhibited by continuous mapping of a straight line into itself. *Ukrainian Mathematical Journal*, vol. 16, No 1, 1964, 61-71, in Russian.

V. A. Krysko and O. Ovsianikova
Saratov State University, Department of Mathematics
410054, B. Sadovaya, 96^a, fl. 77
Saratov, Russia
tak@san.ru

J. Awrejcewicz
Technical University of Lodz
Department of Automatics and Biomechanics
1/15 Stefanowskiego St.
90-924 Lodz, Poland
awrejcew@p.lodz.pl